


Classic Flag

The Classic range remains as popular today as ever, easy to install and available in a wide variety of colours and sizes, it continues to be a perennial favourite among installers and homeowners alike.



Pedestrian
Use

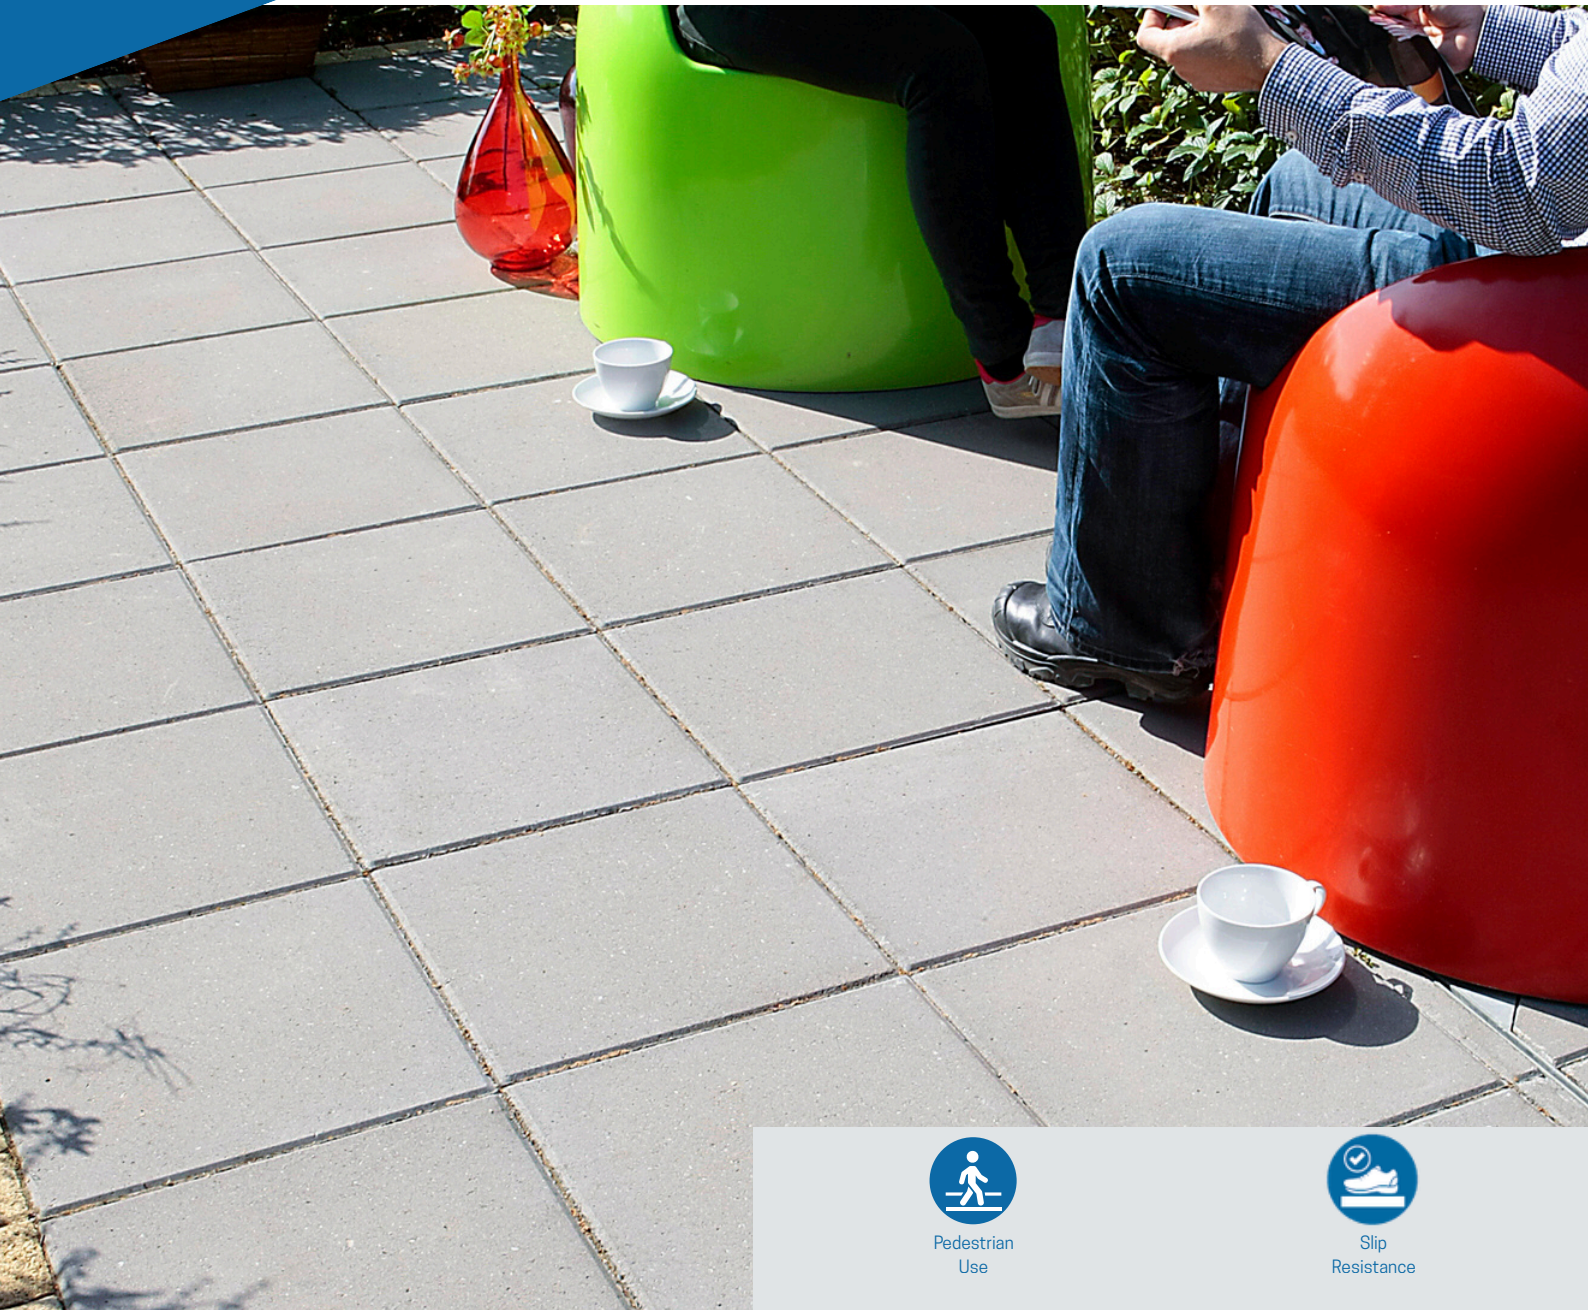


Slip
Resistance

Colour Profile



Natural



Charcoal



Buff



Curragh Gold



Rustic

3D Profile




Features

- Manufactured from high-strength concrete for durability and long-term performance
- Subtle textured surface with premium granite aggregates for a natural stone aesthetic
- A contemporary alternative to porcelain or natural stone, offering style with versatility


Benefits

- Exceptional durability thanks to a high cement-content surface layer
- Maintains a consistently low slip potential throughout its lifecycle
- More cost-effective to supply and install compared to natural granite or porcelain

Sizing



600 x 600



450 x 450



400 x 400

Packaging Information

Dimensions (mm)	Colours	Pcs per m ²	m ² per Bale	Pcs per Bale	Pcs per Layer	No of Layers	Approx Bale Weight (kg)	Profile
400x400x40	Natural, Charcoal, Buff, Curragh Gold, Rustic	6.25	13.44	84	6	14	1239	Chamfer
450x450x40	Natural, Charcoal, Buff, Curragh Gold, Rustic	4.94	12.96	64	4	16	1211	Chamfer
400x400x50	Natural, Charcoal, Buff, Curragh Gold, Rustic	6.25	11.52	72	6	12	1240	Chamfer
450x450x50	Natural, Charcoal, Buff, Curragh Gold, Rustic	4.94	11.34	56	4	14	1298	Chamfer
600x600x50	Natural, Charcoal, Buff, Curragh Gold, Rustic	2.78	10.8	30	2	15	1340	Chamfer

Technical Performance and Data

Product Type	Concrete Flag Paving
Product Standard	EN 1338: 2003
Manufacturing Method	Hydraulically pressed semi - dry concrete
Finish	Standard finish
Package Information	Baled, strapped and plastic cover
Slip/Skid Resistance	Low - Typically USRV/ PTV >60
Strength	Compliant to EN 1338: 2003 class 1
Application & Trafficking	Product installation to BS7533 - 4:2006, Please refer to the relevant part of BS7533 for the correct sub - base design and the most suitable product size for your application. Product suitable for pedestrian use only.
Joint	Classic Flag paving have a 1.5mm approx. internal spacer nib which will give a resulting standard joint width of approx. 2mm when laid. Joints should be filled with kiln dried sand for an unbound surface. Note that silver granite kiln dried sand must be used for silver and buff colour option to reduce potential staining.
BREEAM	A rated in accordance with Green Guide Specification Edition 4, 2009. A+ rated when used in conjunction with a prepared recycle sub - base.