

Kilsaran

KPRO
FAÇADE

The Complete Rendering Solution



Kilsaran

KPRO FAÇADE

Kilsaran's extensive range of renders provides customers, designers and specifiers with a full range of façade solutions. Whether looking for preparatory products, undercoats, or coloured decorative finish coat renders, Kilsaran has a product to suit your needs. Our rendering mortars are produced in accordance with the requirements of EN 998-1.

Kilsaran rendering mortars are designed for use in accordance with EN 13914. All our rendering mortars are formulated to provide excellent adhesion, superior crack resistance and superb durability.

Whatever the project, choosing a Kilsaran render as part of your façade solution ensures consistency, durability and an unrivalled aesthetic finish.

Get in touch:

Customer Service: csteam@kilsaran.ie

Tech Support: techsupport@kilsaran.ie



Contents

KPRO FAÇADE PRODUCT RANGE	4-9
SYSTEM BUILD UP GUIDE	10-19
TYPICAL STANDARD DETAILS	20-21
THIN COAT PRODUCTS & SYSTEM	22-23
DURAREND CLASSIC SYSTEM	24-25
KPRO ANCILLARY PRODUCTS	26
TECHNICAL SUPPORT & GUIDANCE	27

Scan here for
more information
on our KPRO
Façade Range



Scan here for more
information on
our Best Practice
Application Guide



As a market leader in dry mortar products, Kilsaran offers an extensive range of pre-mixed rendering mortars, which are produced in an ISO 9001, 14001 and 50001 controlled environment. All Kilsaran rendering and plastering mortar products are CE and UKCA marked in accordance with EN 998-1 and Construction Products Regulation No. 305/2011. A number of our rendering and plastering mortars also hold NSAI Agreement and British Board of Agreement certification.

All Kilsaran rendering mortars also have their factory production control independently certified to EN 998-1 further demonstrating their superior quality and stringently controlled production processes.



OCR One Coat Base

KPRO OCR is a fine-grained, one coat, base rendering mortar for both internal and external use.

Product Benefits

- Finer grained
- Consistent high quality mix
- Increased productivity
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Low shrinkage/good crack resistance
- Convenient and User-Friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finish

Sponge | Float | Nap



GP General Purpose Render

KPRO GP Render is a general purpose rendering mortar for use as a multi-coat render for both internal and external use.

Product Benefits

- Consistent high quality mix
- Constant available supply
- Increased productivity
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Low shrinkage/good crack resistance
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finishes

Sponge | Float | Nap



DURAREND Single Coat Render

KPRO DuraRender is a natural grey coloured one-coat rendering mortar for use as a single coat render for external use. It is suitable for both hand and machine application. DuraRender is an ideal undercoat for synthetic render (thin coat) finishes.

Product Benefits

- Consistent high quality mix
- Designed for single coat application
- Increased productivity
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Low shrinkage/good crack resistance
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finishes

Sponge | Float | Nap



UNO One Coat Render

KPRO UNO is a self-coloured, breathable, weather-resistant rendering mortar, available in a range of colours.

Product Benefits

- Consistent high quality mix
- Designed for single coat application
- Increased productivity
- Breathable
- Excellent workability and adhesion
- Low shrinkage/good crack resistance
- Water repellent silicone technology
- Polymer modified
- Convenient and user-friendly
- Promotes cleaner and safer sites



Product Finish
Scraped (Textured)



RC Roughcast Render

KPRO RC is a through-coloured roughcast rendering mortar, for use as part of a multi-coat rendering system.

Product Benefits

- Consistent high quality mix
- Constant available supply
- Available in a range of colours
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Low shrinkage/good crack resistance
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finish
Fine Roughcast



UNO - Colour Shade Guide



Ultra White



Off White



Oyster White



Grey



Ivory



Buttermilk



Beige Yellow



Corn Yellow



Golden Yellow



Pale Cream



Sandstone



Fallow Brown



Tan Red



Smoke Black



Charcoal Black

NOTE: This colour chart should only be used as a guide, as finished render colours may vary from colours illustrated above.

DR Dash Receiver

KPRO DR Dash Receiver is a through-coloured rendering mortar backing coat for receiving dry dashing stone.

Product Benefits

- Consistent high quality mix
- Eliminates inaccuracy of site mixing
- Extended open time
- Low shrinkage/
good crack resistance
- Available in a range of colours
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finish

Dry Dashing Stone



TCR Top Coat Render

KPRO TCR is a naturally through-coloured rendering mortar for use as part of a multicoat rendering system. Available in Ultra White and Ash Grey.

Product Benefits

- Consistent high quality mix
- Constant available supply
- Suitable for a range of finishes
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Low shrinkage/
good crack resistance
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finishes

Sponge | Float | Nap



HLR Hydraulic Lime Render

KPRO HLR is a natural coloured hydraulic lime rendering mortar designed for multi-coat render systems.

Product Benefits

- Consistent high quality mix
- Environmentally friendly
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Breathable and flexible
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finishes

Sponge | Float
| Traditional



SB Super Bond Render

KPRO Super Bond is a preparatory rendering mortar for use as a preparatory coat or basecoat on internal and external walls.

Product Benefits

- Consistent high quality mix
- Eliminates inaccurate site mixing
- Excellent adhesion to smooth and low suction backgrounds
- Equalises suction on dissimilar backgrounds
- Low shrinkage/good crack resistance
- Convenient and user-friendly
- Eliminates wastage
- Promotes cleaner and safer sites



Product Finishes

Stipple or Keyed for preparation coat.
| Float Finished for basecoat to thin coat renders.



SYSTEM BUILD UP GUIDE

GP General Purpose Render



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	-	[GP] 10-12mm	See page 21	[GP] 8-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10-12mm	See page 21	[GP] 8-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10mm	See page 21	[GP] 8-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10-12mm	See page 21	[GP] 8-10mm

* Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X**	-	[SB] 10mm	See page 21	[GP] 8-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10mm	See page 21	[GP] 8-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat. ** If brick is dusty and friable.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10mm	See page 21	[GP] 8-10mm
METHOD 2	QP X	[SB] 3-4mm*	[GP] 10mm	See page 21	[GP] 8-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



NATURAL STONWORK

Not suitable for this substrate if jointed/pointed with lime mortars.



RENDER CARRIER BOARD


Not suitable for this substrate.

DuraRend Single Coat Render



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	-	-	See page 21	15-20mm
METHOD 2	-	[SB] 3-4mm*	-	See page 21	15-20mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	[SB] 3-4mm	-	See page 21	15-20mm
METHOD 2	QP X	-	-	See page 21	15-20mm

Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	[SB] 3-4mm*	-	See page 21	15-20mm
METHOD 2	QP X**	[SB] 3-4mm	-	See page 21	15-20mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat. ** If brick is dusty and friable.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	[SB] 3-4mm	-	See page 21	10-15mm



NATURAL STONWORK

Not suitable for this substrate if jointed/pointed with lime mortars.



RENDER CARRIER BOARD

Not suitable for this substrate.


SYSTEM BUILD UP GUIDE

UNO One Coat Render



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	-	-	See page 21	15-20mm
METHOD 2	-	[SB] 3-4mm*	-	See page 21	15-20mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	[SB] 3-4mm	-	See page 21	15-20mm
METHOD 2	QP X	-	-	See page 21	15-20mm

Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	[SB] 3-4mm*	-	See page 21	15-20mm
METHOD 2	QP X**	[SB] 3-4mm	-	See page 21	15-20mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat. ** If brick is dusty and friable.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	[SB] 3-4mm	-	See page 21	10-15mm



NATURAL STONWORK

Not suitable for this substrate if jointed/pointed with lime mortars.



RENDER CARRIER BOARD

Please contact our technical team for more information

RC Roughcast Render



	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
METHOD 1	-	-	[GP] 10mm [OCR] 10mm	[DR] 7-8mm	See page 21	3-4mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10mm [OCR] 10mm	[DR] 7-8mm	See page 21	3-4mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10mm	[DR] 7-8mm	See page 21	3-4mm
METHOD 2	-	-	-	-	See page 21	-

* Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
METHOD 1	-	-	[SB] 10mm	[DR] 7-8mm	See page 21	3-4mm
METHOD 2	QP X**	-	[SB] 10mm	[DR] 7-8mm	See page 21	3-4mm

* If hand applying. ** If brick is dusty and friable.



	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10mm	[DR] 7-8mm	See page 21	3-4mm
METHOD 2	-	-	-	-	See page 21	-

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



NATURAL STONEWORK

Not suitable for this substrate if jointed/pointed with lime mortars.



RENDER CARRIER BOARD

Not suitable for this substrate.


SYSTEM BUILD UP GUIDE

DR Dash Receiver



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	-	[GP] 10-12mm [OCR] 10-12mm	See page 21	7-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10-12mm [OCR] 10-12mm	See page 21	7-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10mm	See page 21	7-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10-12mm [OCR] 10-12mm	See page 21	7-10mm

* Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X**	-	[SB] 10mm	See page 21	7-10mm
METHOD 2	-	[SB] 3-4mm	[GP] 10mm [OCR] 10mm	See page 21	7-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat. ** If brick is dusty and friable.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10mm	See page 21	7-10mm
METHOD 2	QP X	[SB] 3-4mm	[GP] 10mm [OCR] 10mm	See page 21	7-10mm



NATURAL STONWORK

Not suitable for this substrate if jointed/pointed with lime mortars.



RENDER CARRIER BOARD

Not suitable for this substrate.

TCR Top Coat Render



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	-	[GP] 10-12mm [OCR] 10-12mm	See page 21	8-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10mm [OCR] 10mm	See page 21	8-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	-	[SB] 3-4mm	[GP] 10mm [OCR] 10mm	See page 21	8-10mm
METHOD 2	QP X	-	[SB] 10-12mm	See page 21	8-10mm

* Key Coat can also be a spatterdash or stipple coat.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X**	-	[SB] 10mm	See page 21	[GP] 8-10mm
METHOD 2	-	[SB] 3-4mm*	[GP] 10mm [OCR] 10mm	See page 21	[GP] 8-10mm

* If hand applying – Key Coat can also be a spatterdash or stipple coat. ** If brick is dusty and friable.



	Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
METHOD 1	QP X	-	[SB] 10-12mm	See page 21	8-10mm
METHOD 2	-	-	-	See page 21	-

* If hand applying – Key Coat can also be a spatterdash or stipple coat.



NATURAL STONWORK

Not suitable for this substrate if jointed/pointed with lime mortars.



RENDER CARRIER BOARD

Not suitable for this substrate.

SYSTEM BUILD UP GUIDE

HLR Hydraulic Lime Render



NATURAL STONEWORK	Substrate Prep					Key Coat	Base Coat	Base Coat 2	Finish
	METHOD 1	-	-	-	-	-	10-12mm	-	8-10mm
	METHOD 2	-	-	-	-	-	10mm	10mm	8mm

* Spatterdash of 1 part hydraulic lime to 1 part sand to be used if hand applying.

DENSE BLOCK/ MEDIUM DENSITY BLOCK	Substrate Prep					Key Coat	Base Coat	Reinforcement	Finish
	METHOD 1	-	-	-	-	*See note	10-12mm	See page 21	8-10mm
	METHOD 2	-	-	-	-	*See note	10mm	10mm	8mm

* Spatterdash of 1 part hydraulic lime to 1 part sand to be used if hand applying.

LOW DENSITY BLOCK	Substrate Prep					Key Coat	Base Coat	Reinforcement	Finish
	METHOD 1	-	-	-	-	*See note	10-12mm	See page 21	8-10mm
	METHOD 2	-	-	-	-	*See note	10mm	10mm	8mm

* Spatterdash of 1 part hydraulic lime to 1 part sand to be used.

CLAY BRICK	Substrate Prep					Key Coat	Base Coat	Reinforcement	Finish
	METHOD 1	-	-	-	-	*See note	10-12mm	See page 21	8-10mm
	METHOD 2	-	-	-	-	*See note	10mm	10mm	8mm

* Spatterdash of 1 part hydraulic lime to 1 part sand to be used.



RENDER CARRIER BOARD

Not suitable for application to render carrier board.



CONCRETE (IN-SITU/PRECAST)

Not suitable for application to precast concrete.

Resin Render



DENSE BLOCK/ MEDIUM DENSITY BLOCK		Substrate Prep	Key Coat	Base Coat	Priming	Finish
	METHOD 1	-	-	[DuraR] 15mm [OCR] 15mm	QP 10	SR 1.5 S-SR 1.5
	METHOD 2	-	[SB] 3-4mm	[DuraR] 10mm [OCR] 10mm	QP 10	SR 1.5 S-SR 1.5

* If hand applying – Key Coat can also be a spatterdash or stipple coat.

LOW DENSITY BLOCK		Substrate Prep	Key Coat	Base Coat	Priming	Finish
	METHOD 1	QP X	-	[DuraR] 15mm [OCR] 15mm	QP 10	SR 1.5 S-SR 1.5
	METHOD 2	-	[SB] 3-4mm	[DuraR] 15mm [OCR] 15mm	QP 10	SR 1.5 S-SR 1.5

Key Coat can also be a spatterdash or stipple coat.

CLAY BRICK		Substrate Prep	Key Coat	Base Coat	Priming	Finish
	METHOD 1	QP X**	-	[DuraR] 15mm [OCR] 15mm	QP 10	SR 1.5 S-SR 1.5
	METHOD 2	-	[SB] 3-4mm	[DuraR] 15mm [OCR] 15mm	QP 10	SR 1.5 S-SR 1.5

* If hand applying. ** If brick is dusty and friable.

CONCRETE (IN-SITU/PRECAST)		Substrate Prep	Key Coat	Base Coat	Priming	Finish
	METHOD 1	QP X	[SB] 3-4mm	[DuraR] 10mm [OCR] 10mm	QP 10	SR 1.5 S-SR 1.5
	METHOD 2	QP X	-	[SB] 15mm	QP 10	SR 1.5 S-SR 1.5

Key Coat can also be a spatterdash or stipple coat.

RENDER CARRIER BOARD		Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
	METHOD 1	QP X	-	[SB] 3-4mm*	Mesh**	SR 1.5 S-SR 1.5
	METHOD 2	-	-	-	See page 21	-

* Surface of cured Super Bond must be primed with QP 10 prior to application of Silicone 1.5

** Alkali-resistant mesh cloth must be trowelled into the entire surface and covered by the basecoat, ensuring it sits in the middle of the coat thickness.

NATURAL STONEMWORK		Substrate Prep	Key Coat	Base Coat	Reinforcement	Finish
						

Not suitable for this substrate if jointed/pointed with lime mortars.

SYSTEM BUILD UP GUIDE

Wet Dash



	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
DENSE BLOCK/ MEDIUM DENSITY BLOCK						
METHOD 1	-	-	[GP] 10-12mm [OCR] 10-12mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown
METHOD 2	-	[SB] 3-4mm*	-	-	See page 21	-



* If hand applying – Key Coat can also be a spatterdash or stipple coat.

	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
LOW DENSITY BLOCK						
METHOD 1	-	[SB] 3-4mm	[GP] 8mm [OCR] 8mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown
METHOD 2	QP X	-	[GP] 10-12mm [OCR] 10-12mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown



* Key Coat can also be a spatterdash or stipple coat.

	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
CLAY BRICK						
METHOD 1	-	[SB] 3-4mm	[GP] 8mm [OCR] 8mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown
METHOD 2	QP X**	-	[GP] 10mm [OCR] 10mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown



* If hand applying. ** If brick is dusty and friable.

	Substrate Prep	Key Coat	Base Coat	Buttercoat	Reinforcement	Finish
CONCRETE (IN- SITU/PRECAST)						
METHOD 1	-	[SB] 3-4mm	[GP] 8mm [OCR] 8mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown
METHOD 2	QP X	-	[GP] 10-12mm [OCR] 10-12mm	[GP] 8mm [OCR] 8mm	See page 21	[WD] thrown







* If hand applying – Key Coat can also be a spatterdash or stipple coat.

	NATURAL STONEMWORK	Not suitable for this substrate if jointed/pointed with lime mortars.				
	RENDER CARRIER BOARD	Not suitable for this substrate.				



TYPICAL STANDARD DETAILS


Sill Detail

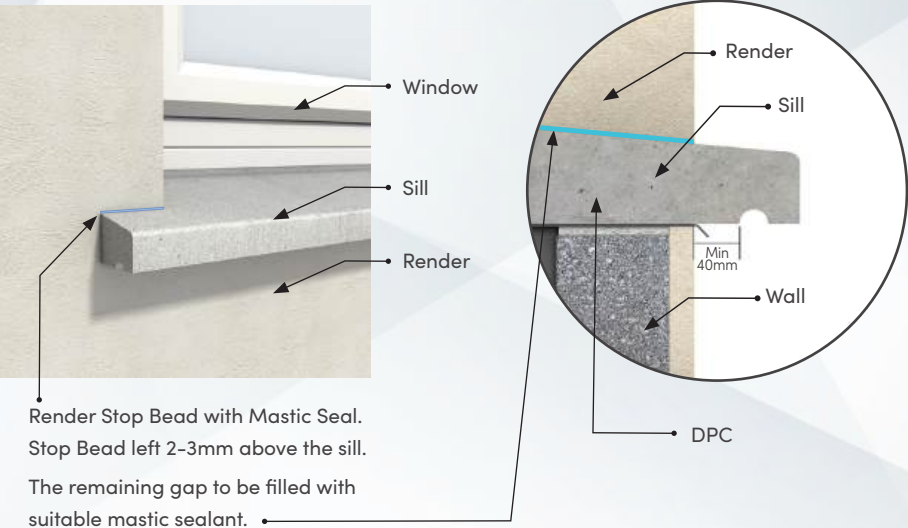

Base Plinth Detail


- 01. Ground Level.
- 02. Damp Proof Course.
- 03. Socle or Drip Bead.

*A higher minimum distance may be necessary due to local climatic conditions.

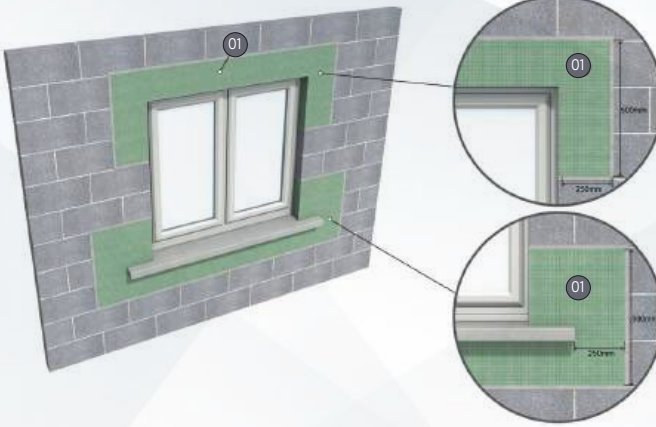

Mesh Reinforcement Around Openings

01. Alkali resistant glass fibre mesh cloth with a resistance or tearing not less than 1.5 kN/5cm.

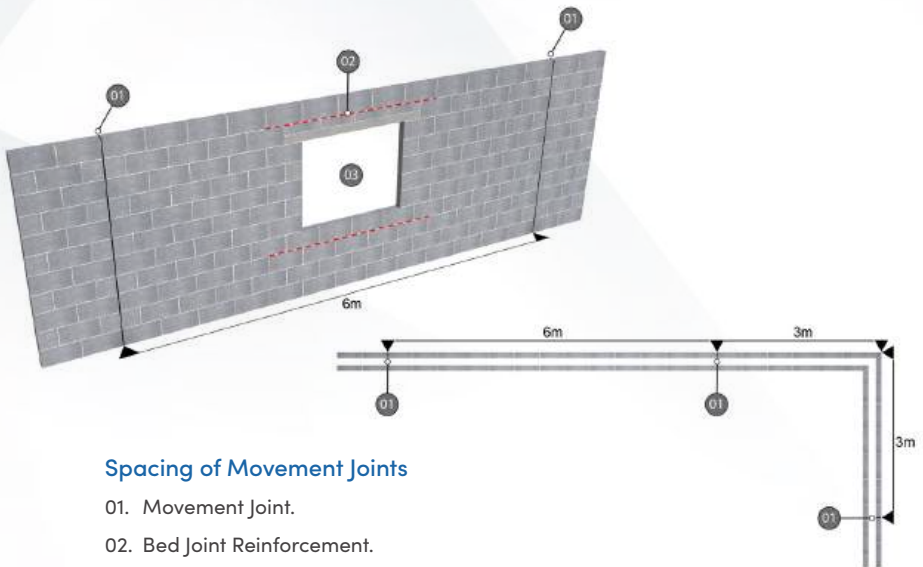

Spacing of Movement Joints

01. Movement Joint.
02. Bed Joint Reinforcement.
03. Window opening.

Scan here
to find out
more about
our typical
standard
details



THIN COAT PRODUCTS AND SYSTEM

SR 1.5 Silicone Render 1.5

- Highly self-cleaning
- Highly resistant to dirt
- Hydrophobic
- Very low water absorption and vapour permeability
- High durability, highly resistant to weather conditions
- High elasticity and impact resistance
- High stability of colour
- Resistant to fungi, algae and mould



S-SR 1.5 Silicate Silicone Render 1.5

- Hydrophobic, resistant to dirt
- Vapour permeable
- Low water absorption
- Resistant to damage
- Highly resistant to weather conditions
- Resistant to fungi, algae and mould



Synthetic Render Colour Selector



Ultra White



Pearl White



Off White



Oyster White



White Cream



Pale Cream



Ivory



Buttermilk



Beige Yellow



Corn Yellow



Golden Yellow



Sandstone



Fallow Brown



Tan Red



Light Sage



Grey



Mist Grey



Smoke Black



Charcoal Black



Slate Black

NOTE: This colour chart should only be used as a guide, as finished render colours may vary from colours illustrated above.

DURAREND CLASSIC SYSTEM

Kilsaran DuraRend is a natural grey coloured rendering mortar designed for single coat application to most common brick work and block work backgrounds. DuraRend is suitable for finishing with scraped, sponge, float or nap finishes.

DuraRend is used as a levelling preparatory coat for a range of finishes including synthetic resin, thin coat renders and paints.




Product Benefits

This product offers many advantages over conventional site mixed or ready-mixed rendering mortars:

- Increased productivity due to one coat application
- Polymer modified
- Eliminates inaccurate site mixing
- Excellent workability and adhesion
- Low shrinkage / good crack resistance
- Suitable as float coat



Cost effective system suitable for low movement risk

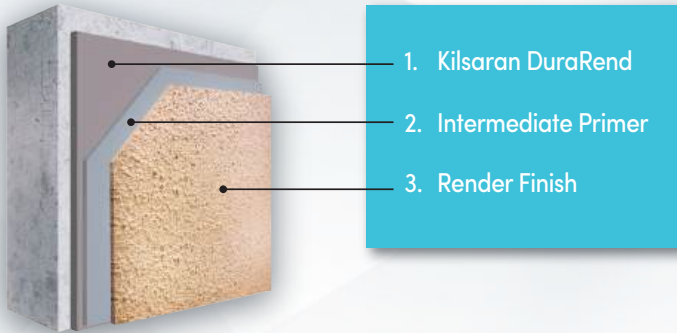

System Components

Kilsaran DuraRend	Cementitious Polymer Modified Sand & Cement Render applied at 15 - 25mm thickness
Primer	QP10 (Primer): Synthetic resin dispersion with mineral fillers and pigments
Render	SR1.5, S-SR1.5 (Render)

> Benefits

- The **DuraRend Classic** system brings the benefit of a low maintenance, weather resistant coloured render with a moderate budget.
- The Classic system should primarily be used where there is a low risk of substrate movement.


System Overview

Application Areas	Masonry Substrates of blockwork & brickwork
	New build and existing structures
Application	Kilsaran DuraRend applied in a single coat application providing a level substrate for the top thin coat render. Render allowed to cure prior to priming.
	Coloured Primer applied by brush and allowed to dry for 2-3 hours.
Render Finish	Stone or rustic texture in a large range of colour options.
	Render applied by machine or trowel and textured to the desired finish.

KPRO ANCILLARY PRODUCTS

KPRO FAÇADE RA1 RENDER ACCELERATOR

Available in 20L drums, KPRO RA1 is designed to decrease the setting time of KPRO renders leading to earlier finishing processes.

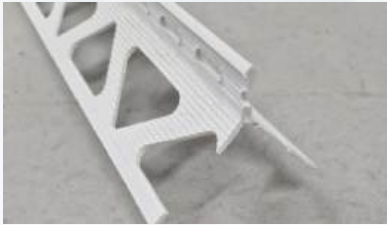

KPRO FAÇADE RENDER UPVC BEADS

A range of PVC beads (corner, stop, reveal, bellcast, movement) for use with KPRO renders.

KPRO FAÇADE GLASS FIBRE REINFORCING MESH

KPRO Façade Mesh is alkali resistant and tearproof suitable for use with KPRO renders.



KPRO FAÇADE QP10

KPRO QP10 Quartz Primer is designed for preparation of difficult substrates for suction control and adhesion purposes.

KPRO FAÇADE QPX

KPRO QPX Bonding Primer is a quartz infused, high-performance and fast-setting bonding primer. It is suitable for application on both absorbent and non-absorbent surfaces, making it ideal for a wide range of substrates.



TECHNICAL SUPPORT & GUIDANCE

OUR TOP TIPS AND STANDARDISED RECOMMENDATIONS



All Kilsaran KPRO rendering mortars are designed for both hand and spray machine application. If hand applying, we recommend the use of a key coat or primer such as KPRO Façade Super Bond or QP10.



Ambient air temperatures influence the setting and drying times of render. Rendering should only be undertaken in temperatures between +5°C and +30°C.



Follow on render coats should be no thicker or stronger than the base coat, they are to be applied over (with the exception of preparatory coats such as Super Bond).



Spray rendering machines vary considerably, whether electric or diesel and depending on rotor and stator types. Mixing water may need to be adjusted slightly for different machines. Contact your local representative for advice.



Our KPRO Façade Design Information & Best Practice Guide provides in-depth information on all things rendering and can be downloaded from our website.

NEED ASSISTANCE WITH A PRODUCT OR PROJECT?

We have a dedicated technical and sales team with a vast knowledge of rendering and rendering systems, who are only a call away.

We can provide:



**COLOUR
CHARTS**



**COLOUR
SAMPLES**



**COLOUR
SIMULATORS**



**TRAINING &
CPD'S**



**STOCKIST
LOCATIONS**



**PROJECT SPECIFIC
SPECIFICATIONS**



Get in touch:

ROI: 01 801 3484

UK: 0161 872 8899

Placing an Order Email:
orders@kilsaran.ie

Customer Service /
General Enquiries Email:
csteam@kilsaran.ie

Tech Support Email:
techsupport@kilsaran.ie

www.kilsaran.ie

